

# KOMATSU®

# PC290LC-11

EPA Tier 4 Final Engine

Australia & New Zealand Specifications

HYDRAULIC EXCAVATOR



Photos may include optional equipment.

**NET HORSEPOWER**

147 kW / 196 HP @ 2050 rpm

**OPERATING WEIGHT**

29,800 – 31,210 kg

**BUCKET CAPACITY**

0.43 – 1.39 m<sup>3</sup>

PC290LC



# WALK-AROUND

PC290LG-11



Photos may include optional equipment.

**NET HORSEPOWER**

147 kW / 196 HP @ 2050 rpm

**OPERATING WEIGHT**

29,800 – 31,210 kg

**BUCKET CAPACITY**

0.43 – 1.39 m<sup>3</sup>

## PERFORMANCE & DURABILITY

**New engine and hydraulic control technology** improves operational efficiency and lowers fuel consumption by up to 9%.

**Excellent Performance and Stable Platform**  
A long reach arm and boom combined with a heavy duty undercarriage provides extended reach with a stable and reliable platform.

A powerful **Komatsu SAA6D107E-3 engine** provides a net output of 147 kW 196 HP. This engine is EPA Tier 4 Final emissions certified.

**Komatsu Variable Geometry Turbocharger (KVGIT)** uses a hydraulic actuator to provide optimum air flow under all speed and load conditions.

**Komatsu Diesel Particulate Filter (KDPF) and Selective Catalytic Reduction (SCR) system** reduce particulate matter and NOx while providing automatic regeneration that does not interfere with daily operation.

**Large displacement high efficiency pumps** provide high flow output at lower engine speed, improving efficiency.

**Komatsu's Closed-centre Load Sensing System (CLSS)** provides quick response and smooth operation to maximise productivity.

**Enhanced working modes** are designed to match engine speed, pump delivery, and system pressure to the application.

The **KOMTRAX®** telematics system is standard on Komatsu equipment with no subscription fees. Using the latest wireless technology, **KOMTRAX®** transmits valuable information such as location, utilisation, and maintenance records to a PC or smartphone app. Custom machine reports are provided for identifying machine efficiency and operating trends. **KOMTRAX®** also provides advanced machine troubleshooting capabilities by continuously monitoring machine health.

### Large LCD colour monitor panel:

- 7" high resolution screen
- Provides "Ecology Guidance" for fuel efficient operation
- Enhanced attachment control

### Rearview monitoring system (standard)

**Equipment Management Monitoring System (EMMS)** continuously monitors machine operation and vital systems to identify machine



issues and assist with troubleshooting.

### Enhanced working environment

- High back, heated air suspension operator seat with adjustable arm rests
- Integrated ROPS cab design (ISO 12117-2)
- Cab meets ISO Level 1 Operator Protective Guard (OPG) top guard (ISO 10262)
- Aux jack and (2) 12V power outlets

### Komatsu designed and manufactured components

**Long arm and boom for extended reach and a heavy duty undercarriage provides stability and long life**

**Handrails (standard)** located on the machine upper structure provide a convenient work area in front of the engine.

**Lockable single pole battery isolation switch** allows a technician to disconnect the power supply before servicing the machine.

**Komatsu Auto Idle Shutdown** helps reduce nonproductive engine idle time and reduces operating costs.

**Operator Identification System** can track machine operation for up to 100 operators.

# PERFORMANCE FEATURES

## KOMATSU NEW ENGINE TECHNOLOGIES


### New Tier 4 Final Engine

The Komatsu SAA6D107E-3 engine is EPA Tier 4 Final emissions certified and provides exceptional performance and efficiency. Based on Komatsu proprietary technologies developed over many years, this new diesel engine reduces nitrogen oxides (NOx) by more than 80% when compared to Tier 4 interim levels. Through the in-house development and production of engines, electronics, and hydraulic components, Komatsu has achieved great advancements in technology, providing high levels of performance and efficiency in virtually all applications.

### Technologies Applied to New Engine



#### Heavy-duty aftertreatment system

This new system combines a Komatsu Diesel Particulate Filter (KDPF) and Selective Catalytic Reduction (SCR). The SCR NOx reduction system injects the correct amount of Diesel Exhaust Fluid (DEF) at the proper rate, thereby decomposing NOx into non-toxic water vapour (H<sub>2</sub>O) and nitrogen gas (N<sub>2</sub>).

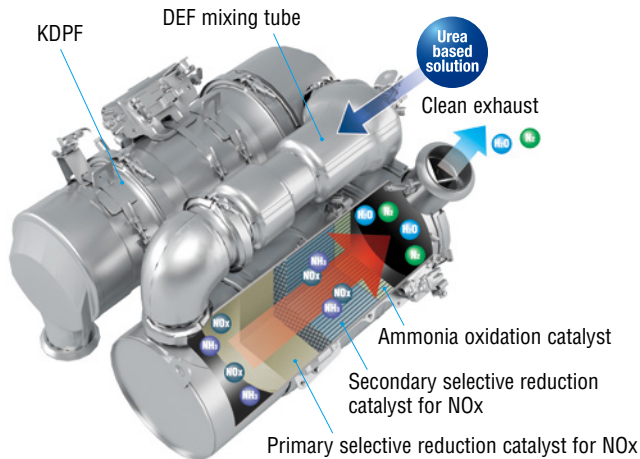

#### Heavy-duty cooled Exhaust Gas Recirculation (EGR) system

The system recirculates a portion of exhaust gas into the air intake and lowers combustion temperatures, thereby reducing NOx emissions. EGR gas flow has been decreased for Tier 4 Final with the addition of SCR technology. The system achieves a dynamic reduction of NOx, while helping maintain T4 interim fuel consumption rates.

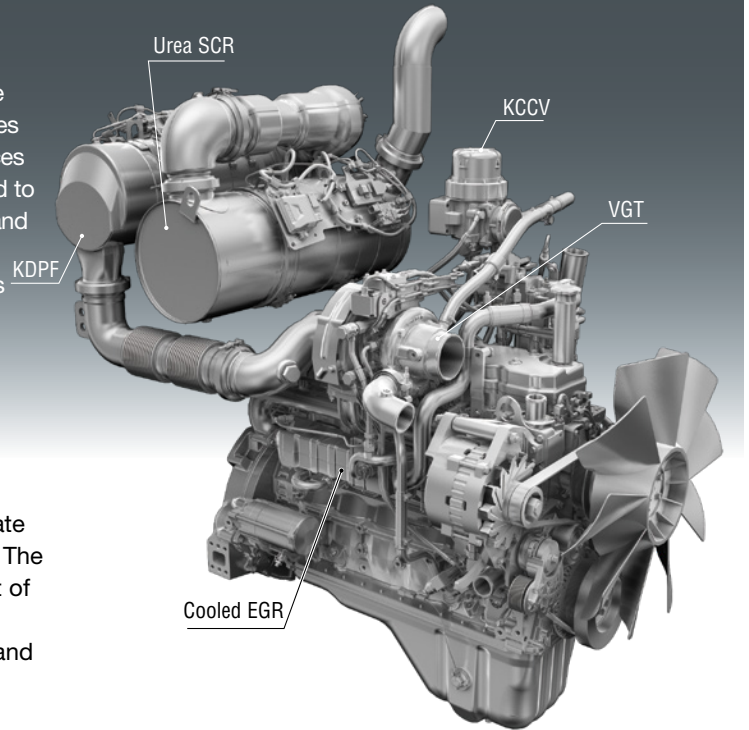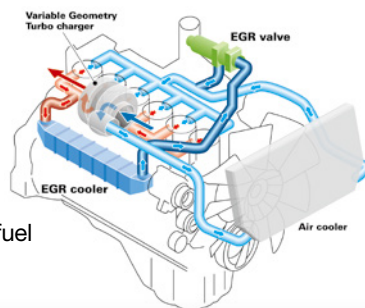


#### Advanced Electronic Control System

The electronic control system performs high-speed processing of all signals from sensors installed in the vehicle providing total control of equipment in all conditions of use. Engine condition information is displayed via an on-board network to the monitor inside the cab, providing necessary information to the operator. Additionally, managing the information via KOMTRAX helps customers keep up with required maintenance.

#### Komatsu Variable Geometry Turbocharger (KVGT) system

The VGT system features proven Komatsu designed hydraulic technology for variable control of air-flow and supplies optimal air according to load conditions. The upgraded version provides better exhaust temperature management.

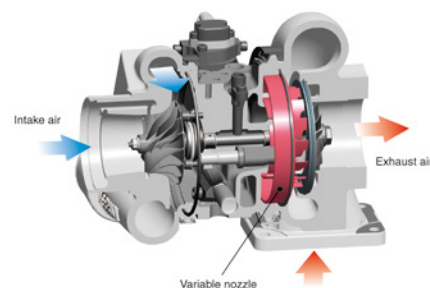

PG290LG-11




### Komatsu Auto Idle Shutdown

Komatsu auto idle shutdown automatically shuts the engine down after idling for a set period of time to reduce unnecessary fuel consumption and exhaust emissions.



### Heavy-Duty High-Pressure Common Rail (HPCR) Fuel Injection System

The system is designed to achieve an optimal injection of high-pressure fuel by means of computerised control, providing close to complete combustion to reduce PM emissions. While this technology is already used in current engines, the new system uses high pressure injection, thereby reducing PM emissions over the entire range of engine operating conditions. The Tier 4 Final engine has advanced fuel injection timing for reduced soot levels.

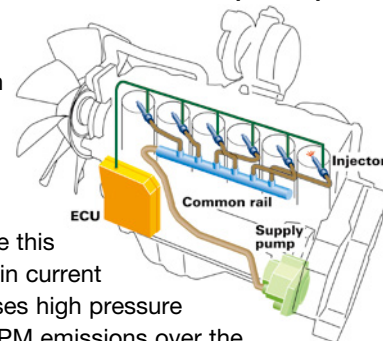

# PERFORMANCE FEATURES

## Reduced Fuel Consumption

The PC290LC-11's new tier 4 final engine along with enhancements in the hydraulic system considerably decreases fuel consumption.

### Fuel Consumption

## Reduced by 9%

(vs PC270LC-8 Based on typical work pattern collected via KOMTRAX)

The fuel consumption data is the result compared actual measured value using the prototype machine.

## Increased Work Efficiency

### Powerful digging force

Functional digging force can be increased with use of the one-touch Power Max. function (up to 8.5 seconds of operation).

### Maximum arm crowd force (ISO)

**124 kN(12.6t) ➔ 133 kN(13.6t) 7% UP**  
(with Power Max.)

### Maximum bucket digging force (ISO)

**184 kN(18.8t) ➔ 198 kN(20.2t) 8% UP**  
(with Power Max.)

Measured with Power Max. function, 3200 mm arm and ISO rating

## Heavy Duty Undercarriage and long reach

The PC290LC-11 utilises a PC360 undercarriage and a heavier 5200 kg counterweight to deliver excellent stability. A long arm with large bore cylinders give the PC290LC-11 a long reach.

- ① Longer Boom
- ② Longer Standard Arm
- ③ Larger Boom, Arm, and Bucket Cylinders
- ④ Greater Swing Torque
- ⑤ Larger Final Drives
- ⑥ Larger Counterweight




## Efficient Hydraulic System

The PC290LC-11 uses a Closed-centre Load Sensing System (CLSS) that improves fuel efficiency and provides quick response to the operator's demands. The PC290LC-11 also incorporates new technology to enhance the engine and hydraulic pump control. This total control system matches the engine and hydraulics at the most efficient point under any load condition. There have also been improvements in the main valve and hydraulic circuit to reduce hydraulic loss, resulting in higher efficient and lower fuel consumption.



## Large Displacement High Efficiency Pump

Large displacement hydraulic implement pumps provide high flow output at lower engine RPM as well as operation at the most efficient engine speed.

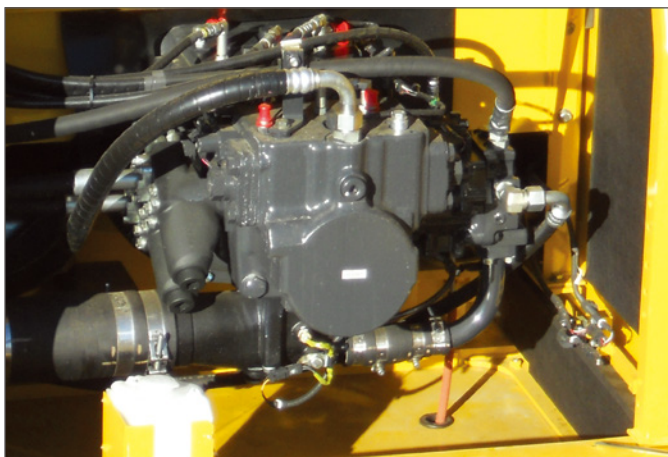

## Working Mode Selection


The PC290LC-11 excavator is equipped with six working modes (P, E, L, B, ATT/P and ATT/E). Power Mode provides improved hydraulic power and faster cycle times for improved performance in demanding applications. Each mode is designed to match engine speed, pump flow, and system pressure to the application. The PC290LC-11 features an attachment mode (ATT/E) that allows operators to run attachments while in Economy mode.

| Working Mode | Application                   | Advantage                                       |
|--------------|-------------------------------|---|
| <b>P</b>     | Power Mode                    | •Maximum production, power & multifunction      |
| <b>E</b>     | Economy Mode                  | •Good cycle times with reduced fuel consumption |
| <b>L</b>     | Lifting Mode/<br>Fine Control | •Increased lifting power & fine control         |
| <b>B</b>     | Breaker Mode                  | •One way flow for hydraulic breaker operation   |
| <b>ATT/P</b> | Attachment Power Mode         | •Two way flow with maximum power                |
| <b>ATT/E</b> | Attachment Economy Mode       | •Two way flow with most efficient fuel economy  |

|              |  |  |
|--------------|--|--|
| <b>P</b>     | Performance priority<br><b>P mode</b>                  |  |
| <b>E</b>     | Fuel savings priority<br><b>E mode</b>                 |  |
| <b>L</b>     | Lifting operation<br><b>L mode</b>                     |  |
| <b>B</b>     | One way flow breaker operation<br><b>B mode</b>        |  |
| <b>ATT/P</b> | Two way flow attachment – Power<br><b>ATT/P mode</b>   |  |
| <b>ATT/E</b> | Two way flow attachment – Economy<br><b>ATT/E mode</b> |  |

## High Rigidity Work Equipment

Booms and arms are constructed with thick plates of high tensile strength steel. In addition, these structures are designed with large cross sectional areas and large one piece steel castings in the boom foot, the boom tip, and the arm tip. The result is work equipment that exhibits long term durability and high resistance to bending and torsional stress. A standard HD boom design provides increased strength and reliability.

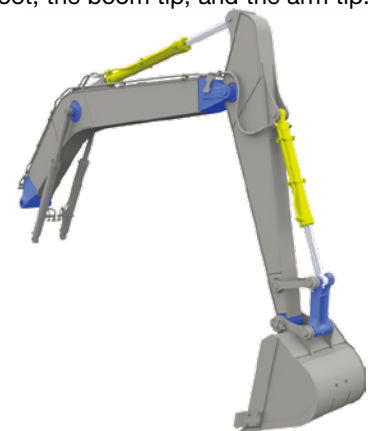



# WORKING ENVIRONMENT

PG290LG-11







**Comfortable Working Space**

**Wide spacious cab**

The wide spacious cab includes a heated air suspension seat with reclining backrest. The seat height and position are easily adjusted using a pull-up lever. The armrest position is easily adjusted together with the console. Reclining the seat further enables it to be fully laid back with the headrest attached.

**Arm rest with simple height adjustment function**

A knob and plunger on the armrests allows easy height adjustment without the use of tools.



**Low vibration with cab damper mounting**

**Automatic climate control**

**Pressurised cab**

**Auxiliary input jack**

Connecting a regular audio device to the auxiliary jack allows the operator to hear the sound from the stereo speakers installed in the cab.



**Standard Equipment**


Sliding window glass (left side)



AM/FM stereo radio



Remote intermittent wiper with windshield washer



Emergency stop & level indicator




ISO Level 2 OPG



Magazine box & cup holder



Defroster (conforms to the ISO standard)



One-touch stored front window lower glass



# WORKING ENVIRONMENT

PC290LC-11

## LARGE HIGH RESOLUTION LCD MONITOR



### New Monitor Panel Interface Design

An updated large high resolution LCD colour monitor enables accurate and smooth work. The interface has been redesigned to display key machine information in a new user friendly interface. A rear view camera and a DEF level gauge display have been added to the default main screen. The interface has a function that enables the main screen mode to be switched, thus enabling the optimum screen information for the particular work situation to be displayed.

#### Indicators


- |                                    |                             |
|------------------------------------|-----------------------------|
| 1 Auto-decelerator                 | 8 Fuel gauge                |
| 2 Working mode                     | 9 DEF level gauge           |
| 3 Travel speed                     | 10 Service metre, clock     |
| 4 Ecology gauge                    | 11 Fuel consumption gauge   |
| 5 Camera display                   | 12 Guidance icon            |
| 6 Engine coolant temperature gauge | 13 Function switches        |
| 7 Hydraulic oil temperature gauge  | 14 Camera direction display |
|                                    | 15 DEF level caution lamp   |

#### Basic operation switches

- |                         |                         |
|-------------------------|-------------------------|
| 1 Auto-decelerator      | 4 Buzzer cancel         |
| 2 Working mode selector | 5 Wiper                 |
| 3 Travel speed selector | 6 Window washer         |
|                         | 7 Auto climate controls |

### Switchable Display Modes

The main screen display mode can be changed by pressing the pressing the F3 key.

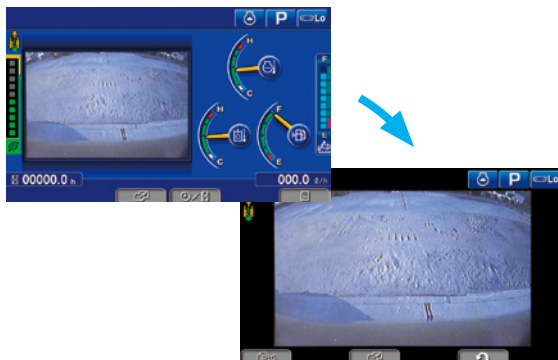

### Visual user menu

Pressing the F6 key on the main screen displays the user menu screen. The menus are grouped for each function, and use easy-to-understand icons which enable the machine to be operated easily.



- |                                       |                    |
|---------------------------------------|--------------------|
| 1 Energy saving guidance              | 2 Machine settings |
| 3 Aftertreatment devices regeneration | 4 SCR information  |
| 5 Maintenance                         | 6 Monitor setting  |
| 7 Message check                       |                    |



## Support Efficiency Improvement

### Ecology guidance

While the machine is operating, ecology guidance pops up on the monitor screen to notify the operator of the status of the machine in real time.

### Ecology gauge & fuel consumption gauge

The monitor screen is provided with an ecology gauge and also a fuel consumption gauge which is displayed continuously. In addition, the operator can set any desired target value of fuel consumption (within the range of the green display), enabling the machine to be operated with better fuel economy.




Ecology gauge      Fuel consumption gauge  
Ecology guidance

### Operation record, fuel consumption history, and ecology guidance record


The ecology guidance menu enables the operator to check the operation record, fuel consumption history and ecology guidance record from the ecology guidance menu, using a single touch, thus assisting operators with reducing total fuel consumption.



Operation record



Fuel consumption history



Ecology guidance record

### Operator Identification Function


An operator identification ID can be set up for each operator, and used to manage operation information of individual machines using KOMTRAX data. Data sent from KOMTRAX can be used to analyse operation status by operator as well as by machine.



# MAINTENANCE FEATURES

## Centralised engine check points

Locations of the engine oil check and filters are integrated into one side to allow easy maintenance and service.

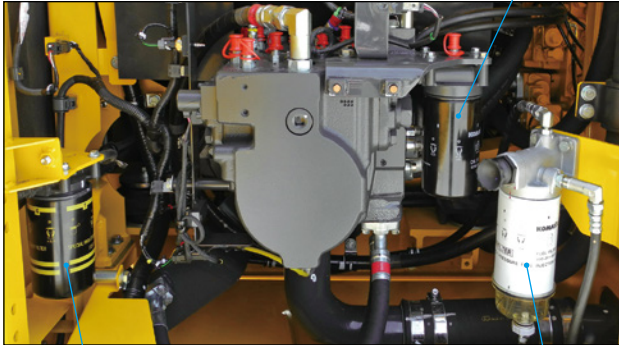

Engine oil filter

High efficiency fuel filter

Fuel pre-filter (with water separator)

## Battery isolation switch

A standard battery isolation switch allows a technician to disconnect the power supply and lock out before servicing the machine.



## Easy to access air conditioner filter

## Washable cab floor mat

## Sloping track frame

## Utility space

## Easy cleaning of coolers

## Fuel pre-filter with water separator

## High efficiency fuel filter

## Easy access to engine oil filter, engine oil, drain valve, fuel drain valve and water separator drain valve





### Long-life oils, filters

High performance filters are used in the hydraulic circuit and engine. By increasing the oil and filter replacement intervals, maintenance costs can be significantly reduced.

|                                |                  |
|--------------------------------|------------------|
| Engine oil & Engine oil filter | every 500 hours  |
| Hydraulic oil                  | every 5000 hours |
| Hydraulic oil filter           | every 1000 hours |



Hydraulic oil filter (Ecology-white element)

### Large capacity air cleaner

Large capacity air cleaner is comparable to that of larger machines. The larger air cleaner can extend air cleaner life during long-term operation and helps prevent early clogging, and resulting power loss. A radial seal design is used for reliability.

### Diesel Exhaust Fluid (DEF) tank

A large tank volume extends operating time before refilling and is installed on the right front platform for easy access. DEF tank and pump are separated for improved service access.



## Maintenance Information

### “Maintenance time caution lamp” display

When the remaining time to maintenance becomes less than 30 hours\*, a maintenance time monitor appears. Pressing the F6 key switches the monitor to the maintenance screen.

\* : The setting can be changed within the range between 10 and 200 hours.



Maintenance screen

### Manual Stationary Regeneration

Under most conditions, active regeneration will occur automatically with no effect on machine operation. In case the operator needs to disable active regeneration or initiate a manual stationary regeneration, this can be easily accomplished through the monitor panel. A soot level indicator is displayed to show how much soot is trapped in the KDPF.



Soot level indicator

Aftertreatment device regeneration screen

### Supports the DEF level and refill timing

The DEF level gauge is displayed continuously on the right side of the monitor screen. In addition, when DEF level is low, DEF low level guidance messages appear in pop up displays to inform the operator in real time.




DEF level gauge



DEF low level guidance

### DT-type connectors

Sealed DT-type electrical connectors provide high reliability, water and dust resistance.

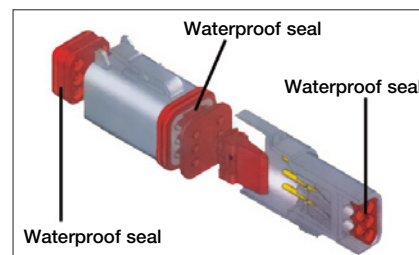

# GENERAL FEATURES

## ROPS CAB STRUCTURE

### ROPS Cab (ISO 12117-2)

The machine is equipped with a ROPS cab that conforms to ISO 12117-2 for excavators as standard equipment. It also satisfies the requirements for Level 1 Operator Protective Guard (OPG) and top guard (ISO 10262).



### Rear View Monitoring System

A new rear view monitoring system display has a rear view camera image that is continuously displayed together with the gauges and important vehicle information. This enables the operator to carry out work while easily checking the surrounding area.

Rear view camera




Rear view image on monitor



### Low Vibration with Viscous Cab Mounts

The PC290LC-11 uses viscous mounts for the cab that incorporate a longer stroke and the addition of a spring. The cab damper mounting combined with a high rigidity deck reduces vibration at the operator's seat.

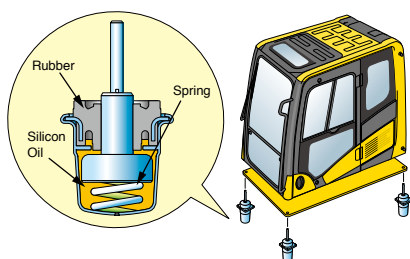

## GENERAL FEATURES

**Secondary engine shut down switch** at base of seat to shutdown the engine.



**Left and right side handrails**



**Seat belt caution indicator**



**Lock lever**

**Seat belt retractable**

**Tempered & tinted glass**

**Large mirrors**

**Slip-resistant plates**

**Thermal and fan guards**

**Pump/engine room partition**

**Travel alarm**

**Large cab entrance step**





# KALSS AUSTRALIAN STANDARD SPECIFICATION




### Rotating Amber Beacon

Fitted with factory guard.




### Level Indicator, Overload Alarm & Anti-Burst Valves

Enable safety and compliance when lifting suspended loads.



### Additional Lighting

Extra lighting on cab and counterweight for improved visibility.



### Proportional Hand Controls

Enables proportional hand control of attachment speed.

### Rock Guard

Reinforced steel plate and ribs to provide additional protection of arm structure.



### Higher Capacity Air Conditioner

With increased cool down performance.

### Bump Rails

For upper protection when slewing.

### Factory Fitted Quick Hitch and Hammer Piping

Enables use with a greater variety of attachments. Also fitted with provision for tilt circuit including valve.

### Revolving Frame Under Covers

Protects and prevents ingress of material into engine bay.



### Lower Front Window Guard

Protects cabin windscreen against rocks and debris.



### Battery Isolation

Single pole, lockable Bosch-type battery isolation.



### E-Stops

Allow compliance to site safety requirements.



### Bolt-on Top Guard

OPG level 2 (ISO 10262) for falling object protection.

# SPECIFICATIONS



## ENGINE

Model ..... Komatsu SAA6D107E-3\*  
 Type ..... Water-cooled, 4-cycle, direct injection  
 Aspiration ..... Variable geometry turbocharged, aftercooled, cooled EGR  
 Number of cylinders ..... 6  
 Bore ..... **107 mm** 4.21"  
 Stroke ..... **124 mm** 4.88"  
 Piston displacement ..... **6.69 ltr** 408 in<sup>3</sup>  
 Horsepower:  
 SAE J1995 ..... Gross **159 kW 213 HP**  
 ISO 9249 / SAE J1349 ..... Net **147 kW 196 HP**  
 Rated rpm ..... **2050**  
 Fan drive method for radiator cooling ..... Mechanical  
 Governor ..... All-speed control, electronic  
 \*EPA Tier 4 Final emissions certified



## HYDRAULICS

Type ..... HydraMind (Hydraulic Mechanical Intelligence) system, closed-centre system with load sensing valves and pressure compensated valves  
 Number of selectable working modes ..... 6  
 Main pump:  
 Type ..... Variable displacement piston type  
 Pumps for ..... Boom, arm, bucket, swing, and travel circuits  
 Maximum flow ..... **490 ltr/min** 129.4 gal/min  
 Supply for control circuit ..... Self-reducing valve  
 Hydraulic motors:  
 Travel ..... 2 x axial piston motors with parking brake  
 Swing ..... 1 x axial piston motor with swing holding brake  
 Relief valve setting:  
 Implement circuits ..... **37.3 MPa 380 kgf/cm<sup>2</sup>** 5,400 psi  
 Travel circuit ..... **37.3 MPa 380 kgf/cm<sup>2</sup>** 5,400 psi  
 Swing circuit ..... **28.9 MPa 295 kgf/cm<sup>2</sup>** 4,190 psi  
 Pilot circuit ..... **3.2 MPa 33 kgf/cm<sup>2</sup>** 470 psi  
 Hydraulic cylinders:  
 (Number of cylinders – bore x stroke x rod diameter)  
 Boom ..... **2–140 mm x 1300 mm x 100 mm** 5.5" x 51.2" x 3.9"  
 Arm ..... **1–150 mm x 1635 mm x 110 mm** 5.9" x 64.3" x 4.3"  
 Bucket... **1–140 mm x 1009 mm x 100 mm** 5.5" x 39.7" x 3.9"



## DRIVES AND BRAKES

Steering control ..... Two levers with pedals  
 Drive method ..... Hydrostatic  
 Maximum drawbar pull ..... **249 kN 25400 kg** 56,000 lb  
 Gradeability ..... 70%, 35°  
 Maximum travel speed (auto-shift):  
 High ..... **5.5 km/h** 3.4 mph  
 Mid ..... **4.1 km/h** 2.5 mph  
 Low ..... **3.0 km/h** 1.9 mph  
 Service brake ..... Hydraulic lock  
 Parking brake ..... Mechanical disc brake



## SWING SYSTEM

Drive method ..... Hydrostatic  
 Swing reduction ..... Planetary gear  
 Swing circle lubrication ..... Grease-bathed  
 Service brake ..... Hydraulic lock  
 Holding brake/Swing lock ..... Mechanical disc brake  
 Swing speed ..... 10.5 rpm  
 Swing torque ..... **8889 kg•m** 64,292 ft lbs



## UNDERCARRIAGE

Centre frame ..... X-frame  
 Track frame ..... Box-section  
 Seal of track ..... Sealed track  
 Track adjuster ..... Hydraulic  
 Number of shoes (each side) ..... 48  
 Number of carrier rollers (each side) ..... 2  
 Number of track rollers (each side) ..... 8



## COOLANT & LUBRICANT CAPACITY (REFILLING)

Fuel tank ..... **400 ltr** 105.7 U.S. gal  
 Coolant ..... **36 ltr** 9.5 U.S. gal  
 Engine ..... **23.1 ltr** 6.1 U.S. gal  
 Final drive, each side ..... **8.0 ltr** 2.1 U.S. gal  
 Swing drive ..... **7.2 ltr** 1.9 U.S. gal  
 Hydraulic tank ..... **132 ltr** 34.9 U.S. gal  
 Hydraulic system ..... **253 ltr** 66.8 U.S. gal  
 DEF tank ..... **23.1 ltr** 6.1 U.S. gal



## OPERATING WEIGHT (APPROXIMATE)

Operating weight includes **6150 mm** one-piece HD boom, **3200 mm** HD arm, rated capacity of lubricants, coolant, full fuel tank, operator, standard equipment, KGA dual lock quick hitch, and SAE heaped **1.39 m<sup>3</sup>** bucket.

| Triple-Grouser Shoes | Operating Weight | Ground Pressure               |
|----------------------|------------------|-------------------------------|
| 600 mm               | <b>30,330 kg</b> | <b>0.58 kg/cm<sup>2</sup></b> |
| 700 mm               | <b>30,730 kg</b> | <b>0.50 kg/cm<sup>2</sup></b> |
| 800 mm               | <b>31,130 kg</b> | <b>0.45 kg/cm<sup>2</sup></b> |

## Component Weights

Arm including bucket cylinder and linkage  
**2500 mm** HD arm assembly ..... **1410 kg** 3,108 lb  
**3200 mm** HD arm assembly ..... **1470 kg** 3,240 lb  
**3500 mm** HD arm assembly ..... **1550 kg** 3,417 lb  
 One piece HD boom including arm cylinder  
**6150 mm** boom assembly ..... **2448 kg** 5,397 lb  
 Boom cylinders x 2 ..... **231 kg** 509 lb  
 Counterweight (standard) ..... **5200 kg** 11,464 lb







## DIMENSIONS

|   | Arm Length                             | 3200 mm  | 2500 mm  | 3500 mm  |
|---|--|----------|----------|----------|
| A | Overall length                         | 10265 mm | 10317 mm | 10275 mm |
| B | Length on ground (transport)           | 5770 mm  | 6628 mm  | 5495 mm  |
| C | Overall height (to top of boom)*       | 3295 mm  | 3367 mm  | 3375 mm  |
| D | Overall width                          | 3390 mm  |          |          |
| E | Overall height (to top of cab)*        | 3180 mm  |          |          |
| F | Overall height (to top of handrail)*   | 3275 mm  |          |          |
| G | Ground clearance, counterweight        | 1215 mm  |          |          |
| H | Ground clearance, minimum              | 495 mm   |          |          |
| I | Tail swing radius                      | 3020 mm  |          |          |
| J | Track length on ground                 | 4030 mm  |          |          |
| K | Track length                           | 4955 mm  |          |          |
| L | Track gauge                            | 2590 mm  |          |          |
| M | Width of crawler                       | 3390 mm  |          |          |
| N | Shoe width                             | 800 mm   |          |          |
| O | Grouser height                         | 36 mm    |          |          |
| P | Machine height to top of counterweight | 2380 mm  |          |          |
| Q | Machine height to top of engine cover  | 2895 mm  |          |          |
| R | Machine upper width                    | 2850 mm  |          |          |
| S | Distance, swing centre to rear end     | 2985 mm  |          |          |

\* : Including grouser height

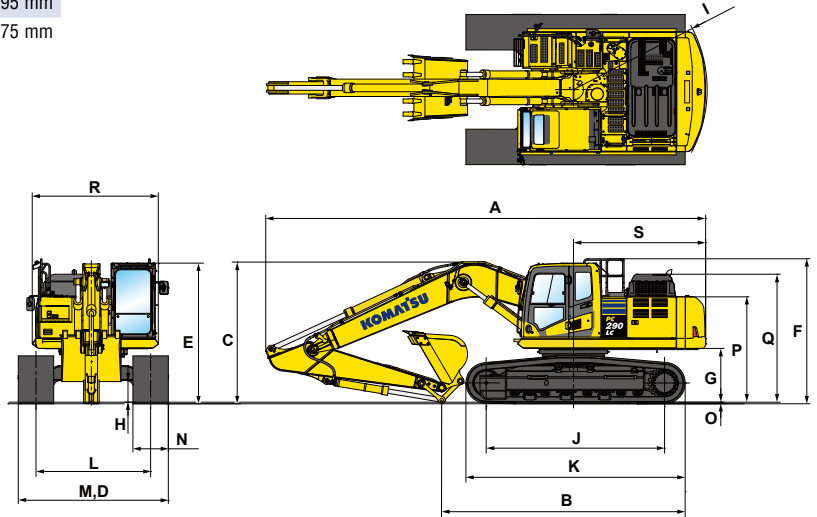

## WORKING RANGE

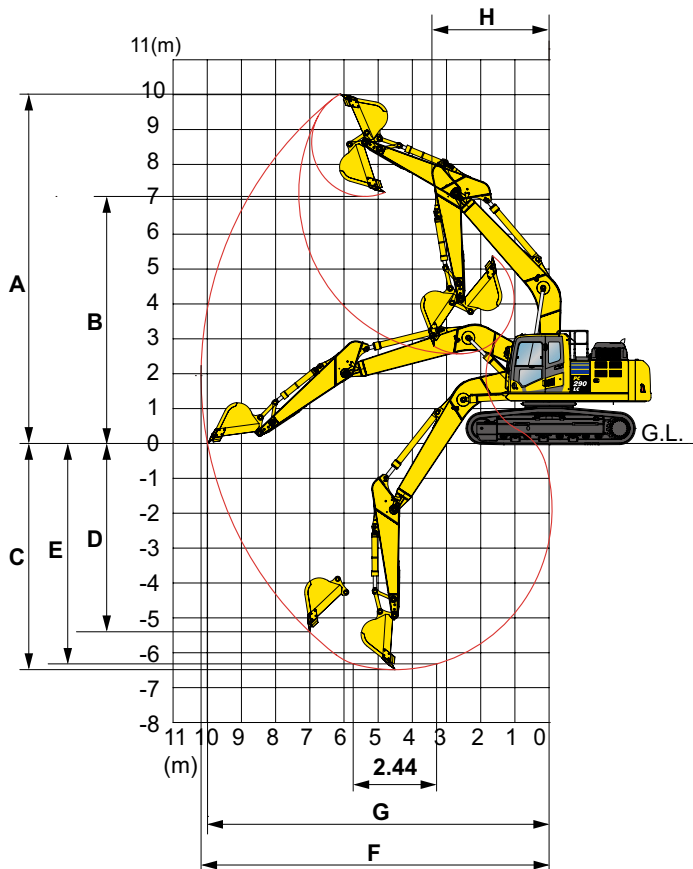


|            | Arm Length                             | 3200 mm            | 2500 mm            | 3500 mm            |
|------------|--|--------------------|--------------------|--------------------|
| A          | Max. digging height                    | 10300 mm           | 9840 mm            | 10355 mm           |
| B          | Max. dumping height                    | 7375 mm            | 6972 mm            | 7435 mm            |
| C          | Max. digging depth                     | 6910 mm            | 6208 mm            | 7220 mm            |
| D          | Max. vertical wall digging depth       | 5790 mm            | 4314 mm            | 5850 mm            |
| E          | Max. digging depth for 8' level bottom | 6750 mm            | 6008 mm            | 7070 mm            |
| F          | Max. digging reach                     | 10710 mm           | 9957 mm            | 10890 mm           |
| G          | Max. digging reach at ground level     | 10450 mm           | 9763 mm            | 10715 mm           |
| H          | Min. swing radius                      | 3680 mm            | 3722 mm            | 3740 mm            |
| SAE rating | Bucket digging force at power max.     | 176 kN<br>17900 kg | 176 kN<br>17900 kg | 176 kN<br>17900 kg |
|            | Arm crowd force at power max.          | 129 kN<br>13100 kg | 165 kN<br>16800 kg | 121 kN<br>12400 kg |
|            |  |                    |                    |                    |
| ISO rating | Bucket digging force at power max.     | 198 kN<br>20200 kg | 198 kN<br>20200 kg | 198 kN<br>20200 kg |
|            | Arm crowd force at power max.          | 133 kN<br>13600 kg | 170 kN<br>17300 kg | 125 kN<br>12800 kg |

# LIFT CAPACITIES



## LIFTING CAPACITY WITH LIFTING MODE

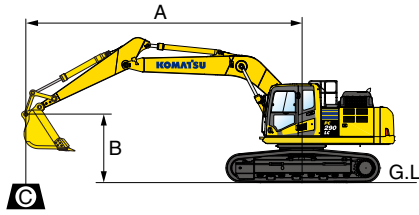

- A: Reach from swing centre
- B: Bucket hook height
- C: Lifting capacity
- Cf: Rating over front
- Cs: Rating over side
- ☉ : Rating at maximum reach

- Conditions:
- Boom length: 6150 mm
  - Arm length: 3200 mm
  - Shoes: 600 triple grouser
  - Bucket: 808 kg

Unit: kg

| B \ A  | 1.5 m  |        | 3.0 m  |        | 4.5 m  |        | 6.0 m |       | 7.5 m |      | ☉ MAX |       |
|--------|--------|--------|--------|--------|--------|--------|-------|-------|-------|------|-------|-------|
|        | Cf     | Cs     | Cf     | Cs     | Cf     | Cs     | Cf    | Cs    | Cf    | Cs   | Cf    | Cs    |
| 6.0 m  |        |        |        |        |        |        |       |       | *5600 | 5300 | *3400 | *3400 |
| 4.5 m  |        |        |        |        |        |        | *7150 | *7150 | *6350 | 5150 | *3450 | *3450 |
| 3.0 m  |        |        | *8850  | *8850  | *11100 | *11100 | *8400 | 7100  | *7150 | 4950 | *3650 | 3500  |
| 1.5 m  |        |        |        |        | *13800 | 10400  | *9750 | 6700  | 7550  | 4750 | *3950 | 3350  |
| 0 m    |        |        | *8150  | *8150  | *15100 | 9900   | 10500 | 6400  | 7350  | 4550 | *4550 | 3400  |
| -1.5 m | *8250  | *8250  | *9750  | *9750  | *15200 | 9700   | 10350 | 6250  | 7250  | 4450 | *5550 | 3700  |
| -3.0 m | *10700 | *10700 | *16500 | *16500 | *14550 | 9750   | 10300 | 6200  | 7250  | 4450 | 6950  | 4250  |
| -4.5 m |        |        | *17800 | *17800 | *12800 | 9950   | *9450 | 6350  |       |      | *8100 | 5650  |

\*Load is limited by hydraulic capacity rather than tipping. Ratings are based on SAE standard No. J1097. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.



PC290LC-11





## STANDARD EQUIPMENT

- 3 speed travel with auto shift
- Alternator, 90 A, 24 V
- AM/FM radio
- Arm, 3200 mm
- Auto idle
- Auto idle shut down
- Automatic air conditioner, large capacity
- Automatic engine warm-up system
- Auxiliary input (3.5 mm jack)
- Batteries, large capacity
- Battery isolation switch, lockable
- Boom, 6150 mm
- Boom and arm burst valve protection
- Bump rails
- Cab guards
  - Lower front window guard
  - Integrated top guard, OPG Level 1
  - Bolt on top guard, OPG Level 2
- Carrier rollers, (2 each side)
- Converter, (2) x 12 V
- Counterweight, 5200 kg
- Dry type air cleaner, double element
- Dual flow hammer piping
- Electric horn
- Emergency stops (3)
- EMMS monitoring system
- Engine, Komatsu SAA6D107E-E
- Fan guard structure
- Fuel system pre-filter 10 micron
- High back air suspension seat, with heat
- High pressure in-line hydraulic filters
- Hydraulic track adjusters
- Hydraumind closed centre load sensing system
- KOMTRAX Level 5.0
- Large LCD colour monitor, high resolution
- Level indicator
- Lock lever
- Lock lever, auto-lock
- Mirrors (LH, RH & sidewise)
- Operator identification system
- Overload alarm
- Power maximising system
- PPC hydraulic control system
- Proportional control handles
- Provision for tilt circuit, including valve
- Pump/engine room partition cover
- Quick hitch piping with safety switch and alarm
- Radiator and oil cooler dustproof net
- Rear reflectors
- Rearview monitoring system (1 camera)
- Revolving frame undercovers
- ROPS cab (ISO 12117-2) with vandal guard provisions
- Rotating beacon with guard
- Seat belt indicator
- Seat belt, retractable, 78 mm
- Secondary engine shutdown switch
- Side by side coolers
- Slip resistant foot plates
- Starter motor, 5.5 kW/24 V x 1
- Suction fan
- Thermal and fan guards
- Track frame swivel guard
- Track roller guides, 3 each side
- Track rollers, 8 each side
- Track shoes, triple grouser, 600 mm
- Travel alarm
- Working lights
  - 1 x boom
  - 1 x RH
  - 3 x cab
  - 1 x counterweight
- Working mode selection system



## OPTIONAL EQUIPMENT

- Arm, 2500 mm
- Arm, 3500 mm
- Autogrease system
- Battery isolation switch, dual pole, lockable
- Belly plates, 8 mm
- Cab guard
  - Full front guard, OPG Level 2
- Cab vandal guard set
- Canvas seat cover
- Fire extinguisher, 1.5 kg
- Fire extinguisher, 4.5 kg
- Fire extinguisher, 9 kg
- Fuel cap vandal guard
- Jump start receptacle
- Radio, multimedia system
- Radio, UHF
- Starter circuit isolation, lockable
- Track roller guards, full length
- Track shoes, triple grouser, 700 mm
- Track shoes, triple grouser, 800 mm
- Turbo timer
- Window tinting




## ATTACHMENT OPTIONS

- Bucket, general purpose, KGA 600 mm, 0.43 m<sup>3</sup>
- Bucket, general purpose, KGA 900 mm, 0.75 m<sup>3</sup>
- Bucket, general purpose, KGA 1200 mm, 1.08 m<sup>3</sup>
- Bucket, general purpose, KGA 1500 mm, 1.39 m<sup>3</sup>
- Bucket, slope finishing, KGA 2000 mm, 1.64 m<sup>3</sup>
- Quick hitch, KGA, dual lock
- Quick hitch, KGA, dual lock, tilting
- Ripper, KGA, single tyne

## COMING SOON

### KOMATSU JMHB230V-1 Hydraulic Breaker



| Model Type               | JMHB230V-1 |             |
|--------------------------|------------|-------------|
| Working weight           | kg         | 1,450       |
| Oil flow (min - max)     | ℓ /min     | 120 - 170   |
| Operating pressure (max) | MPa        | 135         |
| Impact rate              | bpm        | 285 - 1,050 |
| Chisel diameter          | mm         | 122         |
| Acceptable back pressure | bar        | 8           |
| Base machine (min - max) | Ton        | 18 - 30     |

For a complete list of available attachments, please contact your local Komatsu representative.

